

# OUTDOOR LTE FILTER

## LBF-M 694 series

### Outdoor LTE filter

#### APLICACION

LTE protection filter for 4G (694 MHz) and GSM + TETRA (870 MHz-960 MHz) signals received by the antenna.


#### CARACTERÍSTICAS

- Shielded metal box with F connectors that assures a high degree of shielding.
- Metallic box housed in a plastic one, ready to be installed.
- Allows DC pass between any output.
- High rejection against interfering signals.



MODEL	LBF-M 694	
Reference	85062	
Band pass	5÷694	
Attenuation in band	dB	<1dB
Rejection:	703 (uplink) 734 (downlink)	dB >10dB > 60 dB
4G/GSM/TETRA rejection	dB	>60
DC pass	mA	24V/300
Dimensions	mm	89x97x45
Operating temperature range	°C	-20÷50
Weight	Kg	0.16

#### FREQUENCY RESPONSE

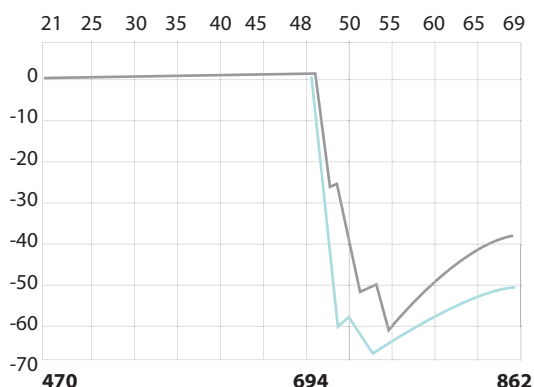

#### Fagor Electrónica, S.Coop.

San Andrés, s/n. E-20500 Mondragón (Spain)  
Tel.: +34 943 71 25 26 Fax: +34 943 71 28 93  
E-mail: rf.sales@fagorelectronica.es  
www.fagorelectronica.com